

LHB03 Linear High Bay

165W | 5000K | 120-347V



Ideal for warehouses, factories, workshops, and more
Energy efficient replacement for traditional fluorescent fixtures and HID high bays



120-347V Driver
with 4kV surge protection

0-10V Dimmable

Instant Start
with no flickering
or humming

Newly Designed,
Shatterproof
Polycarbonate Optics
meet/exceed DLC 5.1
glare standards

Centre Knockout Allows
for Easy Installation of an
Optional Motion Sensor
(sold separately)

Complete with
10' Cord Whip



Mounting Hooks Included
2 x mounting hooks and 2 x 40" chains

Accessories (Sold Separately): Motion Sensor (MS04-MW-TW-DC),
Motion Sensor Remote (HB01R), Wireguard (LHB-110-165-WG),
Bracket (LHB-BRACKET-SM)



TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	22,506 lm
Efficacy	137 lm/W
CCT	5000K
CRI	82
Dimmable	0-10V
Beam Angle	90°
L70 Life	>51,000 hrs
Warranty	5-year


APPROVALS AND LISTINGS

cUL	E482965
DLC Premium	PL3RKFX6DBWO

ILLUMINANCE AT A DISTANCE

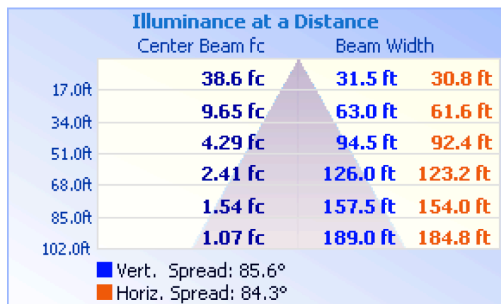

ISOCANDELA

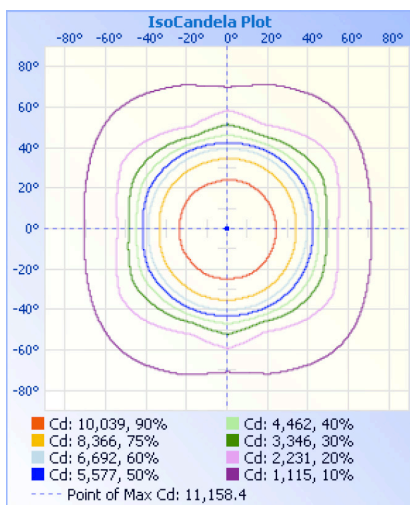

ELECTRICAL

Wattage	165W
Voltage	120-347V
Surge Protection	4kV
Auxiliary Output	12V
Power Factor	0.9
THD	15%
Operating Temp	-25 to 50°C

CONSTRUCTION


Housing	Steel
Finish	Powder Coat
Finish Colour	White
IP Rating	IP20
Net Weight	7.4 kg
Gross Weight	9.1 kg
Product Dimensions	630 x 300 x 48 mm
Carton Qty	2
Carton Dimensions	720 x 360 x 185 mm

ACCESSORIES (SOLD SEPARATELY)

MS04-MW-TW-DC	Motion Sensor
HB01R	Remote for Motion Sensor
LHB-110-165-WG	Wireguard
LHB-BRACKET-SM	Pendant Mounting Bracket

NOTE: Remote (HB01R) is **required** for motion sensor (HB01DMS-A) to function.

DIMENSIONS

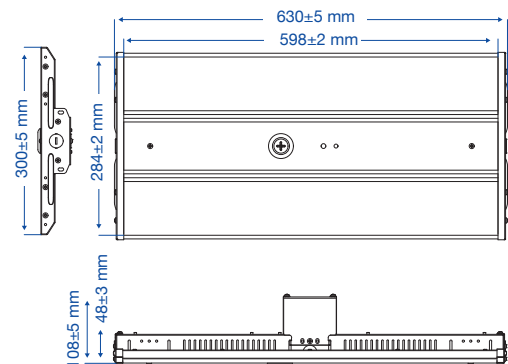

HEAD OFFICE: 8 - 540 Jamieson Pkwy, Cambridge, ON, N3C 0G5 | orders@csc-led.com | (519) 880 - 9833