

Photocell

Photocell Cap for use with 120-277V applications




- Built-in Surge Arrestor
- 3-20 Second Time Delay
- Photodiode Sensor
- Fail-on Mode


INSTALLATION

Disconnect power; wire the receptacle according to the diagram below. Push the photocontroller on and twist it clockwise to lock it into the receptacle.

Install the photocontroller with the Photocell facing the NORTH direction as indicated on the top of the photocontroller. Adjust the receptacle position if necessary.

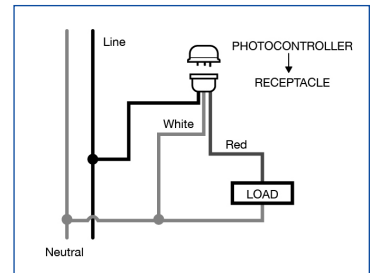

DIMENSIONS

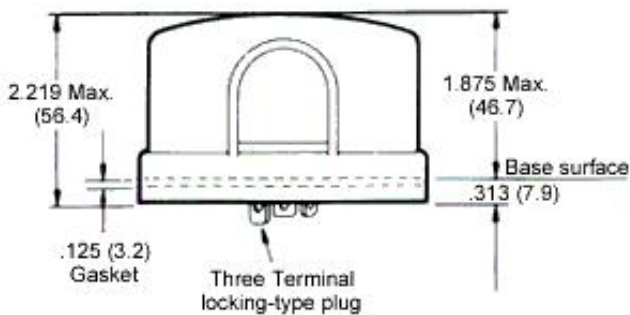

TECHNICAL PARAMETERS

Applicable Voltage	105-305V
Rated Voltage	110-277V
Rated Loading	1000W Tungsten 1800VA Ballast
On/Off Level	On: 6 Lx Off: 50 Lx
Power Consumption	1.5VA
Ambient Temperature	-40°C to 70°C
Operating Humidity	99% RH
Approx. Weight	135g

Western Canada Warehouse: 121-1647 Broadway Street, Port Coquitlam, BC V3C 6P8 | ordersbc@csc-led.com