


Architectural Linear Strip

20W | CCT Selectable | 120-347V | 2ft

Elevate your space by creating your own custom lighting design
Ideal for use in offices, conference rooms, hallways, educational facilities, and more



Flexible Mounting Options
(T Bar, Suspension, and Wall Mount kits sold separately)

0-10V Dimmable

Damp Location Rated

CCT Selectable
(3000K/3500K/4000K)

4 Backlit Connector Options Available
to help you create your own seamless and unique design

Polycarbonate Frosted Lens
optional deep cell Louver available

31.5" Power Cord With Dimming Cables
connect to input power or other luminaires in row mounting applications





TECHNICAL DATA


LIGHT SPECIFICATIONS

Lumens	2,300 lm
Efficacy	115 lm/W
CCT	Selectable (30K/35K/40K)
CRI	≥80
Dimmable	0-10V
L70 Life	>50,000 hrs
Warranty	5-year

APPROVALS AND LISTINGS


cUL	E482965
-----	---------

DIMENSIONAL DRAWING (IN)

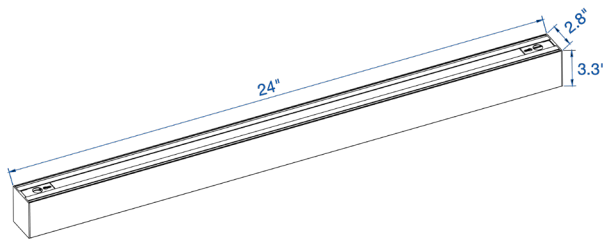

CONNECTORS (Sold Separately)

AL-120-CON-BK	120° Connector (Black)
AL-L-CON-BK	90° Connector (Black)
AL-T-CON-BK	T Connector (Black)
AL-X-CON-BK	X Connector (Black)

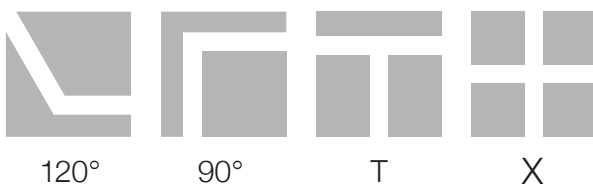

ELECTRICAL

Wattage	20W
Voltage	120-347V
Current	0.167A
Surge Protection	2kV
Auxiliary Output	N/A
Power Factor	>0.9
THD	>20%
Operating Temp	-40°C to 55°C

CONSTRUCTION

Power Cord	31.5"
Housing	Aluminum
Finish Colour	Black
Lens	Polycarbonate
IP Rating	IP20 (Damp Location)

DIMENSIONS AND WEIGHTS

Product Dimensions	24" x 2.8" x 3.3"
Fixture Weight	3.96 lbs
Carton Qty	1
Carton Gross Weight	4.2 lbs
Carton Dimensions	24.8" x 3" x 3.7"
Master Carton Qty	6
Master Carton Gross Weight	28.9 lbs
Master Carton Dimensions	25.4" x 11.8" x 6.9"

KITS AND MOUNTING (Sold Separately)

AL-C-KIT-BK	Connection Kit (Black)
AL-S-KIT-BK	Suspension Kit (Black)
AL-WM-KIT-BK	Wall Mount Kit (Black)
AL-TB-KIT	T Bar Mounting Kit

NOTE: All Connectors require Connection Kits (AL-C-KIT-BK). Please refer to the connector product sheets to learn more.

HEAD OFFICE: 8 - 540 Jamieson Pkwy, Cambridge, ON, N3C 0G5 | orders@csc-led.com | (519) 880 - 9833