


Architectural Linear Strip

80W | CCT Selectable | 120-347V | 8ft

Elevate your space by creating your own custom lighting design
Ideal for use in offices, conference rooms, hallways, educational facilities, and more

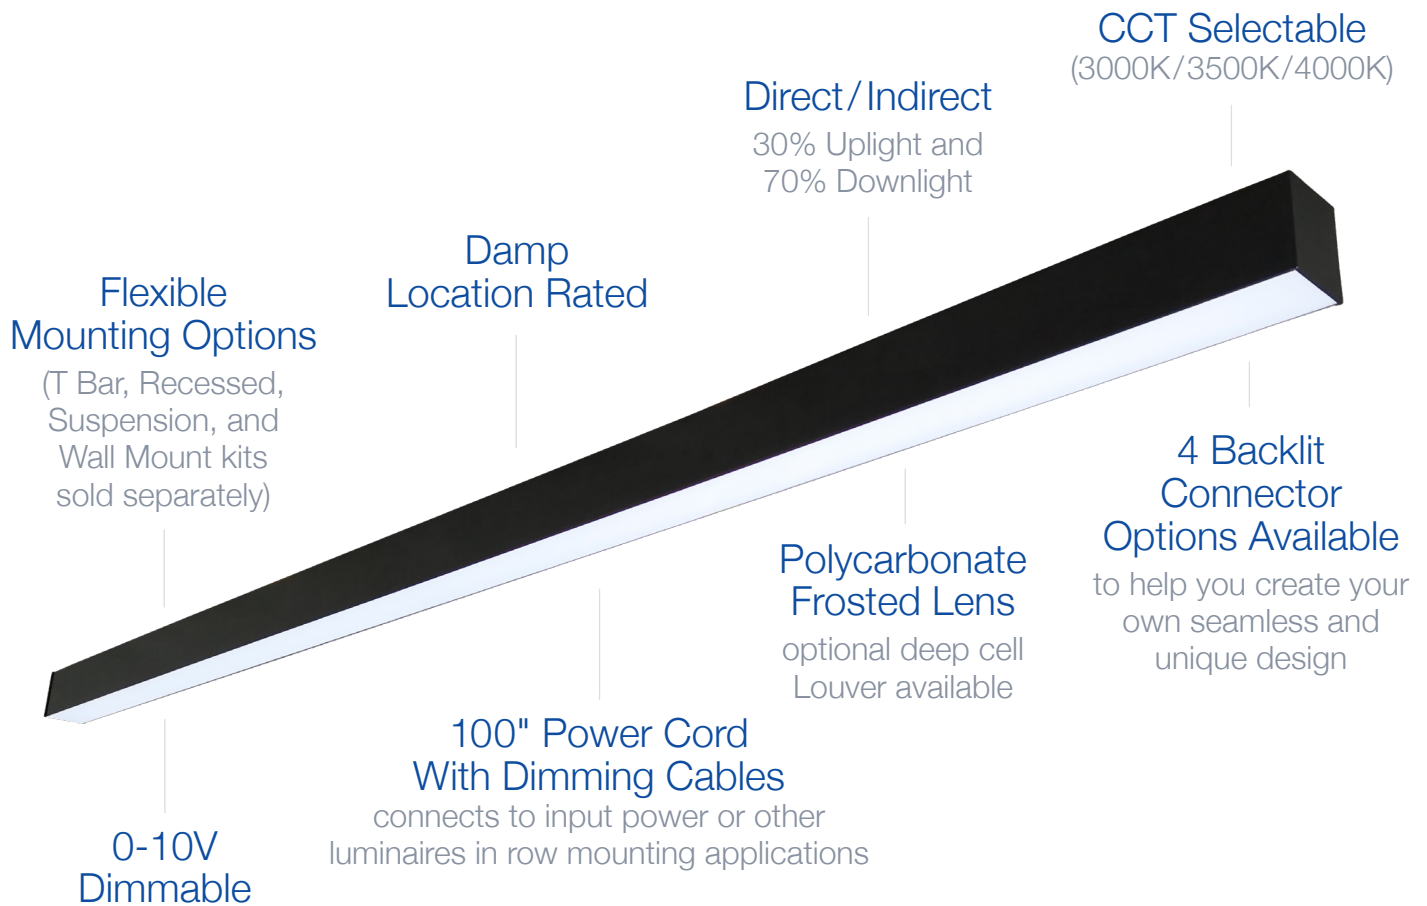

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	9,263 lm
Efficacy	112.76 lm/W
CCT	Selectable (30K/35K/40K)
CRI	83
Dimmable	0-10V
L70 Life	>50,000 hrs
Warranty	5-year

APPROVALS AND LISTINGS


cUL	E482965
-----	---------

DIMENSIONAL DRAWING

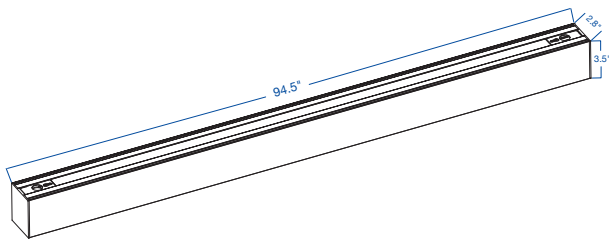

CONNECTORS (Sold Separately)

AL-120-CON-BK	120° Connector (Black)
AL-L-CON-BK	90° Connector (Black)
AL-T-CON-BK	T Connector (Black)
AL-X-CON-BK	X Connector (Black)

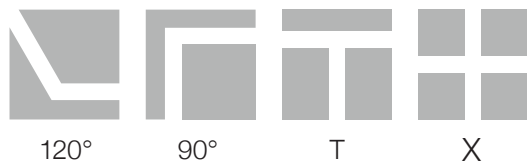

NOTE: All Connectors require Connection Kits (AL-C-KIT-BK). Please refer to the connector product sheets to learn more.

ELECTRICAL

Wattage	80W
Voltage	120-347V
Current	0.85A
Surge Protection	4kV
Auxiliary Output	N/A
Power Factor	>0.9
THD	6.1%
Operating Temp	-30°C to 40°C

CONSTRUCTION

Power Cord	100"
Housing	Aluminum
Finish Colour	Black
Lens	Polycarbonate
IP Rating	IP20 (Damp Location)

DIMENSIONS AND WEIGHTS

Product Dimensions	94.5" x 2.8" x 3.5"
Fixture Weight	12.1 lbs
Carton Qty	1
Carton Gross Weight	13.4 lbs
Carton Dimensions	95.5" x 3" x 3.7"
Master Carton Qty	4
Master Carton Gross Weight	50.7 lbs
Master Carton Dimensions	96.1" x 6.9" x 7.9"

KITS AND MOUNTING (Sold Separately)

AL-C-KIT-BK	Connection Kit (Black)
*AL-L-KIT	Louver Kit
*AL-MR-KIT	Mud-In Recessed Kit
AL-S-KIT-BK	Suspension Kit (Black)
AL-WM-KIT-BK	Wall Mount Kit (Black)
AL-TB-KIT	T Bar Mounting Kit

* Requires x2 kits for use with 8' fixtures (sold separately)

HEAD OFFICE: 8 - 540 Jamieson Pkwy, Cambridge, ON, N3C 0G5 | orders@csc-led.com | (519) 880 - 9833