

# Architectural Linear Strip

80W | CCT Tunable | 120-347V | 8ft

Elevate your space by creating your own custom lighting design  
Ideal for use in offices, conference rooms, hallways, educational facilities, and more

CCT Tunable  
(3000K/3500K/4000K)

Direct/Indirect  
30% Uplight and  
70% Downlight

100" Power Cord  
Included

Flexible  
Mounting Options  
(T Bar, Recessed,  
Suspension, and  
Wall Mount kits  
sold separately)

Damp  
Location Rated



4 Backlit  
Connector  
Options Available  
to help you create your  
own seamless and  
unique design

Polycarbonate  
Frosted Lens  
Optional deep cell  
Louver available

0-10V Dimmable





## TECHNICAL DATA


### LIGHT SPECIFICATIONS

Lumens	9,263 lm @ 3000K
Efficacy	112.76 lm/W
CCT	Tunable (30K/35K/40K)
CRI	83
Dimmable	0-10V
L70 Life	>50,000 hrs
Warranty	5-year

### APPROVALS AND LISTINGS

cUL	E482965
-----	---------

### DIMENSIONAL DRAWING

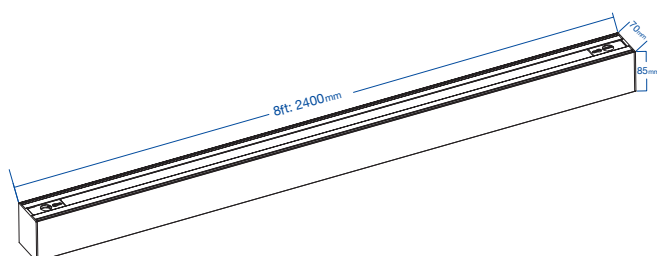

### CONNECTORS (Sold Separately)

AL-120-CON	120° Connector
AL-L-CON	90° Connector
AL-T-CON	T Connector
AL-X-CON	X Connector



### ELECTRICAL

Wattage	80W
Voltage	120-347V
Surge Protection	4kV
Auxiliary Output	N/A
Power Factor	>0.9
THD	6.1%
Operating Temp	-30 to 40°C

### CONSTRUCTION

Power Cord	100"
Housing	Aluminum
Finish Colour	White
Lens	Polycarbonate
IP Rating	Damp Location

### DIMENSIONS AND WEIGHTS

Fixture Net Weight	5.12 kgs
Pieces Per Carton	4
Carton Net Weight	20.5 kgs
Carton Gross Weight	23 kgs
Carton Meas.	2440 x 200 x 175 mm

### KITS AND MOUNTING (Sold Separately)

AL-C-KIT	Connection Kit
*AL-L-KIT	Louver Kit
*AL-MR-KIT	Mud-In Recessed Kit
*AL-R-KIT	Recessed Kit
AL-S-KIT	Suspension Kit
AL-WM-KIT	Wall Mount Kit
AL-TB-KIT	T Bar Mounting Kit

\* Requires x2 kits for use with 8' fixtures (sold separately)

**NOTE:** All Connectors require Connection Kits (AL-C-KIT). Please refer to the connector product sheets to learn more.