

# AWP04 Architectural Wall Pack

Power Selectable | 3CCT | 120-347V


Meet the successor to our AWP03 series Wall Packs, **now power and colour selectable!**  
Ideal for building entrances, multi-use facilities, apartment buildings, institutions, schools, and more

Power Selectable  
10W/20W/30W/40W

Adjustable 0-90°  
for precise aiming

Colour Selectable  
3000K/4000K/5000K

Durable Die-Cast  
Aluminum Housing

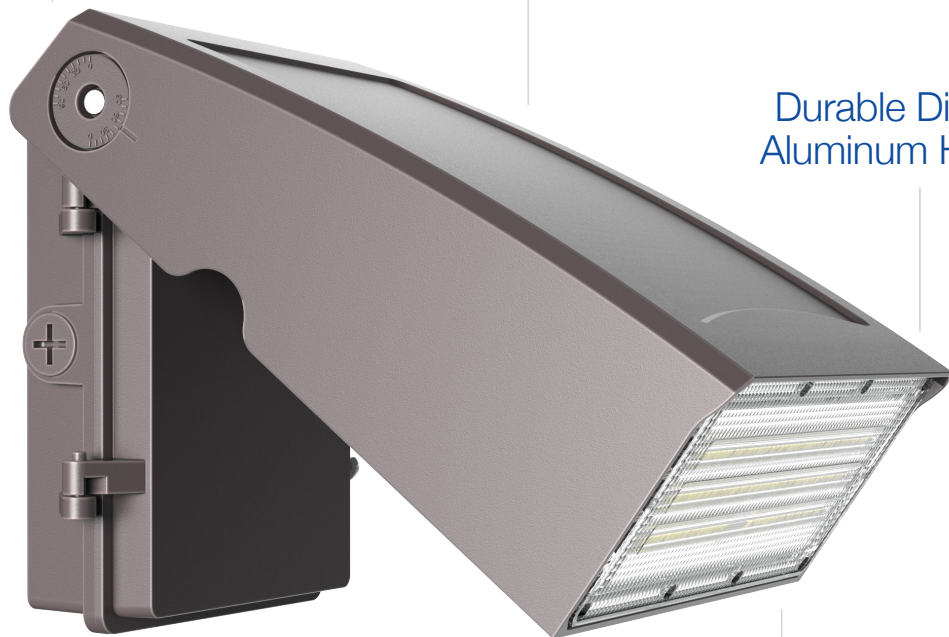

Standard Junction  
Box Mount  
with facility for photocell  
(sold separately)

Built-in Water  
Drainage

UV-Resistant Polycarbonate  
Refractor Lens  
with Type II distribution

## TECHNICAL DATA




### LIGHT SPECIFICATIONS

Lumens	5,059 lm
Efficacy	126.47 lm/W
CCT	3000K/4000K/5000K
CRI	72
Dimmable	0-10V
L70 Life	50,000 hrs
Warranty	10-year


### APPROVALS AND LISTINGS

cETL	5018387
------	---------

### ISOCANDELA PLOT

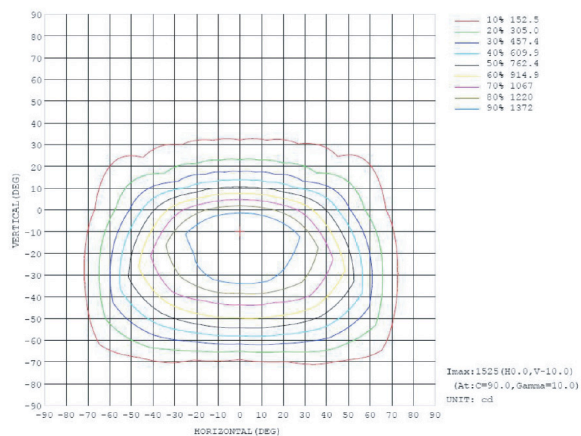

### LUMINOUS INTENSITY DISTRIBUTION

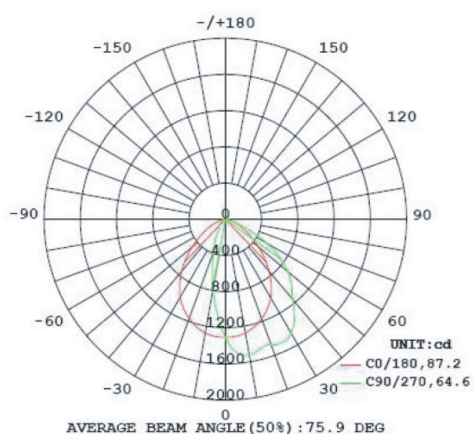


### ELECTRICAL

Wattage	10W/20W/30W/40W
Voltage	120-347V
Current	0.45A
Power Factor	0.9
THD	15%
Operating Temp	-30 to 45°C


### CONSTRUCTION

Housing	Die-Cast Aluminum
Lens	Polycarbonate
Finish	Bronze
IP Rating	IP65
Net Weight	1.59 kg
Gross Weight	1.92 kg
Carton Qty	1
Master Carton Dimensions	245 x 200 x 135 mm

### DIMENSIONS

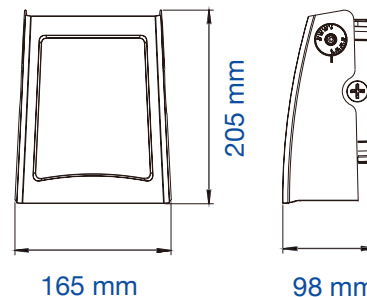

### SPECTRORADIOMETRIC PARAMETERS

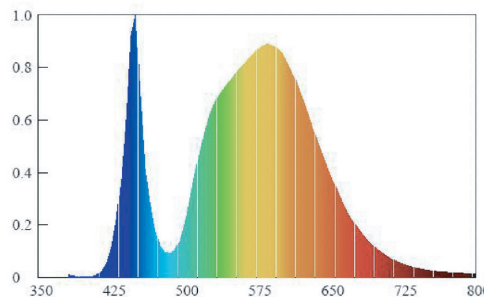

Western Canada Warehouse: 121-1647 Broadway Street, Port Coquitlam, BC V3C 6P8 | [ordersbc@csc-led.com](mailto:ordersbc@csc-led.com)