

# CWP02 120W Wall Pack



CWP02 series Wall Packs

Ideal for exterior security and entryway lighting

LM80 tested  
Lumiled light engine

Purpose built  
driver inside



Glass lens

Die-cast aluminum body

Photocell ready

## TECHNICAL DATA



### LIGHT SPECIFICATIONS

Lumens	17,453 lm
Efficacy	143.65 lm/W
CCT	5000K
CRI	80
Dimmable	0-10V
Warranty	10-year

### APPROVALS AND LISTINGS


cUL	E482965
DLC Premium	PLJAUIE2ACHT

### ILLUMINANCE AT A DISTANCE

	Center Beam fc	Beam Width	
3.3ft	355.5 fc	9.7 ft	7.8 ft
6.6ft	88.9 fc	19.4 ft	15.7 ft
9.9ft	39.5 fc	29.0 ft	23.5 ft
13.2ft	22.2 fc	38.7 ft	31.4 ft
16.5ft	14.2 fc	48.4 ft	39.2 ft
19.8ft	9.9 fc	58.1 ft	47.1 ft

■ Vert. Spread: 111.4°  
■ Horiz. Spread: 99.9°

### ISOCANDELA PLOT

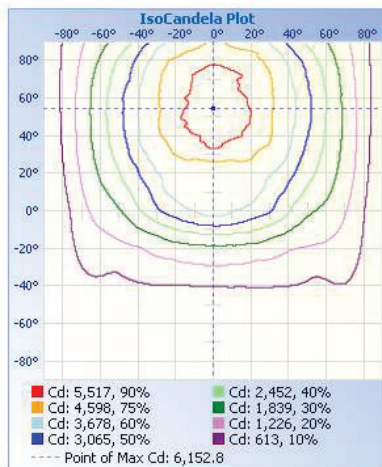

### ELECTRICAL

Wattage	120W
Voltage	120-277V
Power factor	0.90
THD	15%
Operating temp	-40° to 40°C

### CONSTRUCTION

Housing	Aluminum / Borosilicate glass
Colour	Bronze
IP rating	IP65
Weight	9.96 lbs
Carton qty	1

### DIMENSIONS

