

150W Flood / Area Light



NEW FLO4 Series

Sleek, streamlined design with premium performance

LM80
Tested Chips

Polyester
Powder Coat Finish
Bronze Standard

Highest Grade
Polycarbonate Optics
Type III Standard
Type V Available

Trunnion Mount Standard
Field-Interchangeable:
Slip Fitter, Pole, or Multi-Mount
Ordered Separately

Options available (ordered separately):

Pole Mount



FL04-PM

Multi Mount



FL04-MM

Slip Fit Mount



FL04-SF

Visor



FL04-SHIELD-1M

Motion Sensor or Photocell



FL04-MMS-KIT

FLPC-LV

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	19,587 lm
Efficacy	125.23 lm/W
CCT	4000K
CRI	72.6
L70 Life	54,000
Dimmable	0-10V
Warranty	10-year


APPROVALS AND LISTINGS

cUL	E482965
DLC	PL99UDSHW266

ILLUMINANCE AT A DISTANCE

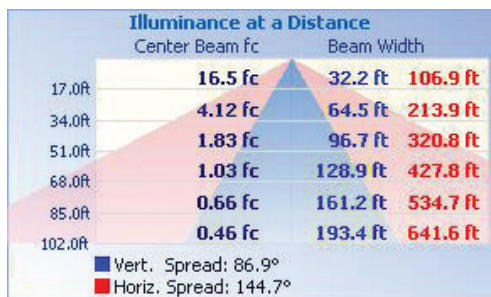

ISOCANDELA PLOT

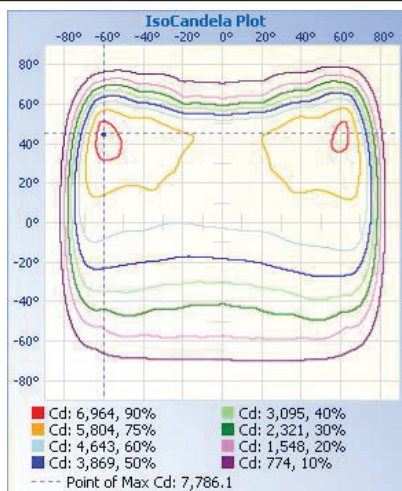

ELECTRICAL

Wattage	150W
Voltage	120-277V
Power factor	0.93
THD	8.9%
Operating temp	-40 to 40°C

CONSTRUCTION

Housing	Aluminum alloy
Finish	Polyester powder coat
Colour	Bronze
IP rating	IP65
EPA rating	45° - 1.13 ft ² Horizontal - 0.8 ft ² Vertical - 1.6 ft ²
Weight	11.02 lbs
Carton qty	1

DIMENSIONS

