

150W Flood / Area Light, 277-480V



FL04 Series

Sleek, streamlined design with premium performance

LM80
Tested Chips

Polyester
Powder Coat Finish
White



Highest Grade
Polycarbonate Optics

Type III Standard
Type V Available

Shown here with
Slip Fitter Mount

Trunnion Mount Standard

Field-Interchangeable:
Slip Fitter, Pole, or Multi-Mount
Ordered Separately

Options available (ordered separately):

Pole Mount



FL04-PM-WH

Multi Mount



FL04-MM-WH

Slip Fit Mount



FL04-SF-WH

Visor



FL04-SHIELD-SM-WH

Photocell



FLPC-HV

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	19,500 lm
Efficacy	127.58 lm/W
CCT	5000K
CRI	70
L70 Life	54,000
Dimmable	0-10V
Warranty	10-year


APPROVALS AND LISTINGS

cUL	E482965
DLC	PLCK58XLDPL8

ILLUMINANCE AT A DISTANCE

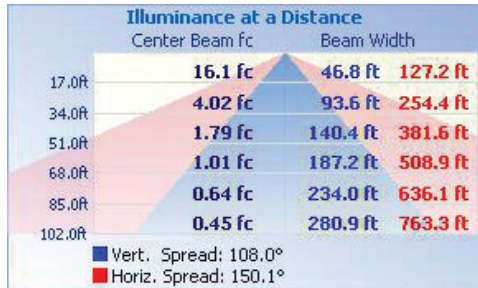

ISOCANDELA PLOT

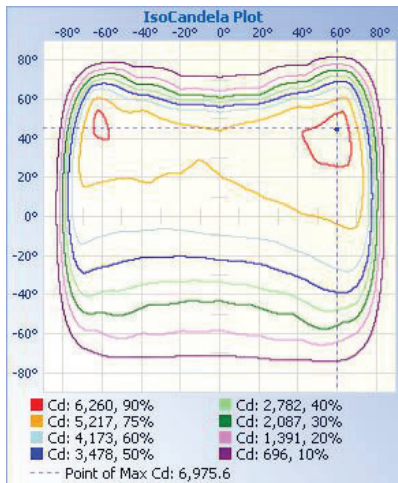

ELECTRICAL

Wattage	150W
Voltage	277-480V
Power factor	0.90
THD	15%
Operating temp	-40 to 40°C

CONSTRUCTION

Housing	Aluminum alloy
Finish	Polyester powder coat
Colour	White
IP rating	IP65
EPA rating	45° - 1.13 ft ² Horizontal - 0.8 ft ² Vertical - 1.6 ft ²
Weight	11.02 lbs
Carton qty	1

DIMENSIONS

