

450W Flood / Area Light, 277-480V



NEW FL04 Series

Sleek, streamlined design with premium performance



LM80
Tested Chips

Polyester
Powder Coat Finish
Bronze Standard

Highest Grade
Polycarbonate Optics
Type III Standard
Type V Available

Trunnion Mount Standard
Field-Interchangeable:
Universal Slip Fitter
(sold separately)

Options available (sold separately):

Universal
Slip Fitter

Photocell



SLIPFIT-UV

FLPC-HV

TECHNICAL DATA



LIGHT SPECIFICATIONS

Lumens	57,368 lm
Efficacy	129.19 lm/W
CCT	5000K
CRI	70
L70 Life	54,000
Warranty	10-year

ELECTRICAL

Wattage	450W
Voltage	277-480V
Power factor	0.90
THD	15%
Operating temp	-40 to 40°C


APPROVALS AND LISTINGS

cUL	E482965
DLC Premium	PLLS5F779U45


CONSTRUCTION

Housing	Aluminum alloy
Finish	Polyester powder coat
Colour	Bronze
IP rating	IP65
EPA rating	45° - 2.34 ft ² Horizontal - 1.4 ft ² Vertical - 3.2 ft ²
Weight	27.3 lbs
Carton qty	1

ILLUMINANCE AT A DISTANCE

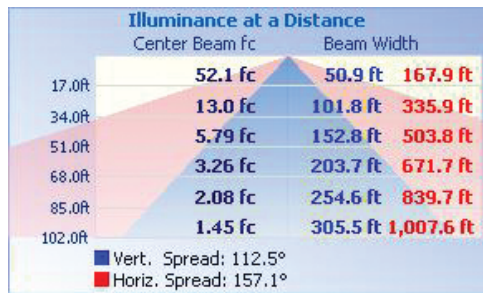

DIMENSIONS

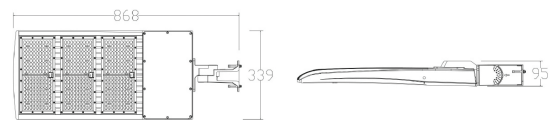

ISOCANDELA PLOT

