

# FL04B Flood / Area Light


100W | 4000K | 120-347V



**TRUE UNIVERSAL POWER INPUT FROM 120-347V!**

A versatile, clean, and modern appearance that brings a pleasing aesthetic to any project

**Removable Access Plate**  
for easy field installation of  
twist lock photocell receptacle

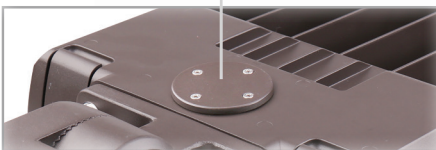


**Rugged Die Cast  
Aluminum Housing**  
(Bronze)

**Type III  
Polycarbonate Optics**  
Type IV and V available

**Pre-wired for Optional  
Motion Sensor**  
(Sensor & remote sold separately)



HB01R MS04-MW-TW-DC

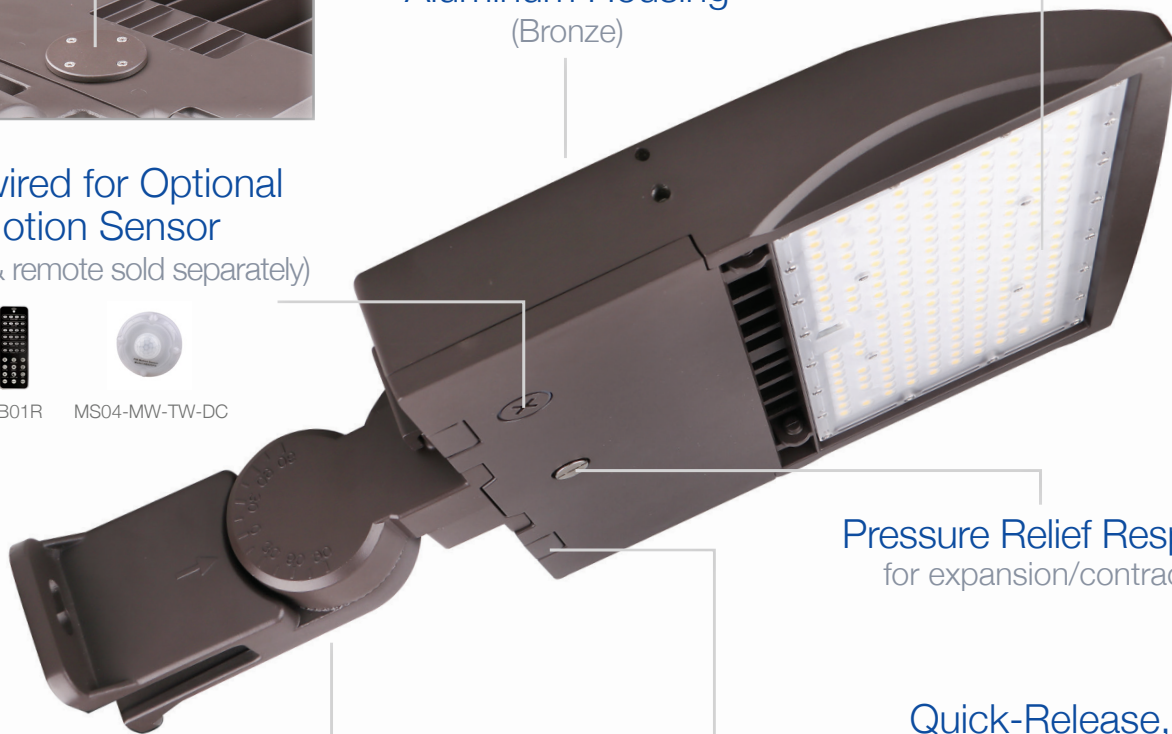

**Pressure Relief Respirator**  
for expansion/contraction

**Complete with Trunnion**  
Interchangeable mounting  
options sold separately

**Quick-Release,  
Hinged Access Cover**  
for control compartment

**Accessories (Ordered Separately):**  
Yoke Mount, Slip Fit, Pole Mount, Multi Mount, Motion  
Sensor Remote, Motion Sensor, Type IV and V Optics,  
Photocell and Receptacle, Shield



FL04-YK-LG



FL04-SF



FL04-PM



FL04-MM



HB01R



MS04-MW-TW-DC

## TECHNICAL DATA




### LIGHT SPECIFICATIONS

Lumens	13,990 lm
Efficacy	145 lm/W
CCT	4000K
CRI	72
L70 Life	50,000 hrs
Dimmable	0-10V
Warranty	10-year


### APPROVALS AND LISTINGS

cUL	E482965
DLC	PLUMERTCLV3Z


### ISOCANDELA



### ILLUMINANCE AT A DISTANCE



### DIMENSIONS (SHOWN WITH TRUNNION MOUNT)

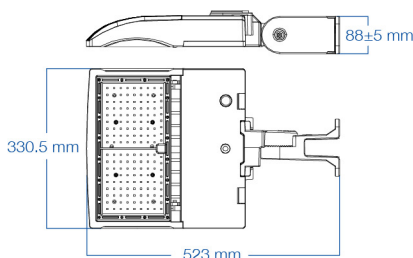

### ELECTRICAL

Wattage	100W
Voltage	120-347V
Power Factor	0.9
THD	20%
Operating Temp	-30 to 50°C

### CONSTRUCTION

Housing	Die-Cast Aluminum
Cover	Polycarbonate
Finish	Bronze
IP Rating	IP65
EPA	1.32 ft²
Net Weight	5.22 kg
Gross Weight	5.92 kg
Carton Qty	1
Carton Dimensions	645 x 405 x 155 mm

### ACCESSORIES (SOLD SEPARATELY)

Slip Fit	FL04-SF
Pole Mount	FL04-PM
Multi Mount	FL04-MM
Yoke Mount	FL04-YK-LG
Motion Sensor	MS04-MW-TW-DC
Motion Sensor Remote	HB01R
Photocell and Receptacle for 120-277V	JL-200 and JL-205LV
Photocell and Receptacle for 277-480V	JL-200 and JL-207E
Shield	FL04B-SHIELD-SM
Type IV Optics	FL04B-TYPE-IV
Type V Optics	FL04B-TYPE-V