

FL04B Flood / Area Light


150W | 4000K | 120-347V



TRUE UNIVERSAL POWER INPUT FROM 120-347V!

A versatile, clean, and modern appearance that brings a pleasing aesthetic to any project

Removable Access Plate
for easy field installation of
twist lock photocell receptacle

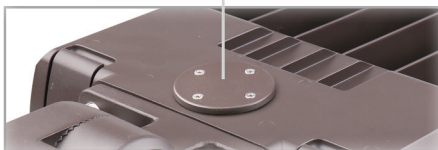


**Rugged Die Cast
Aluminum Housing**
(Bronze)

**Type III
Polycarbonate Optics**
Type IV and V available

**Pre-wired for Optional
Motion Sensor**
(Sensor & remote sold separately)



HB01R MS04-MW-HW-DC

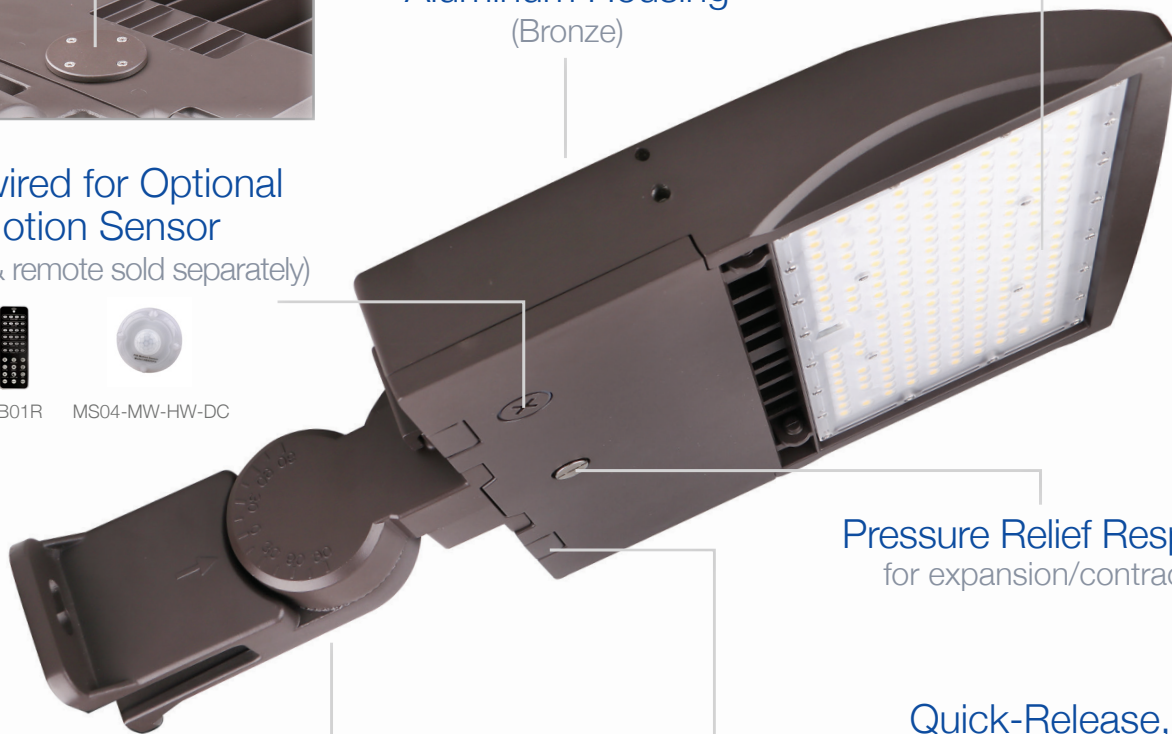

Pressure Relief Respirator
for expansion/contraction

Complete with Trunnion
Interchangeable mounting
options sold separately

**Quick-Release,
Hinged Access Cover**
for control compartment

Accessories (Ordered Separately):
Yoke Mount, Slip Fit, Pole Mount, Multi Mount, Motion
Sensor Remote, Motion Sensor, Type IV and V Optics,
Photocell and Receptacle, Shield



FL04-YK-LG



FL04-SF



FL04-PM



FL04-MM



HB01R



MS01-MW-TW-DC

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	20,423 lm
Efficacy	135 lm/W
CCT	4000K
CRI	73
L70 Life	50,000 hrs
Dimmable	0-10V
Warranty	10-year

APPROVALS AND LISTINGS

cUL	E482965
DLC	PLJ1CMVRE1AX

ISOCANDELA




ILLUMINANCE AT A DISTANCE

Center Beam fc	Beam Width	
17.0ft	16.4 fc	54.3 ft 190.3 ft
34.0ft	4.09 fc	108.5 ft 380.5 ft
51.0ft	1.82 fc	162.8 ft 570.8 ft
68.0ft	1.02 fc	217.1 ft 761.1 ft
85.0ft	0.65 fc	271.3 ft 951.4 ft
102.0ft	0.45 fc	325.6 ft 1,141.6 ft

■ Vert. Spread: 115.9°
■ Horiz. Spread: 159.7°

DIMENSIONS (SHOWN WITH TRUNNION MOUNT)

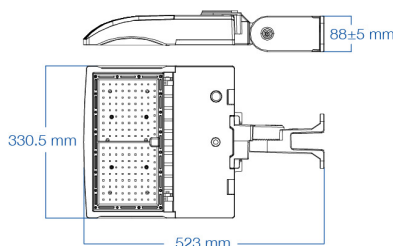

ELECTRICAL

Wattage	150W
Voltage	120-347V
Power Factor	0.9
THD	15%
Operating Temp	-30 to 50°C

CONSTRUCTION

Housing	Die-Cast Aluminum
Cover	Polycarbonate
Finish	Bronze
IP Rating	IP65
EPA	1.32 ft²
Net Weight	6.36 kg
Gross Weight	7.11 kg
Carton Qty	1
Carton Dimensions	690 x 380 x 155 mm

ACCESSORIES (SOLD SEPARATELY)

Slip Fit	FL04-SF
Pole Mount	FL04-PM
Multi Mount	FL04-MM
Yoke Mount	FL04-YK-LG
Motion Sensor	MS04-MW-TW-DC
Motion Sensor Remote	HB01R
Photocell and Receptacle for 120-277V sites	JL-200 and JL-205LV
Photocell and Receptacle for 277-480V sites	JL-200 and JL-207E
Shield	FL04B-SHIELD-SM
Type IV Optics	FL04B-TYPE-IV
Type V Optics	FL04B-TYPE-V

Western Canada Warehouse: 121-1647 Broadway Street, Port Coquitlam, BC V3C 6P8 | ordersbc@csc-led.com