

# FL04B Flood / Area Light

450W | 4000K | 120-347V




**TRUE UNIVERSAL POWER INPUT FROM 120-347V!**

A versatile, clean, and modern appearance that brings a pleasing aesthetic to any project

### Removable Access Plate

for easy field installation of twist lock photocell receptacle

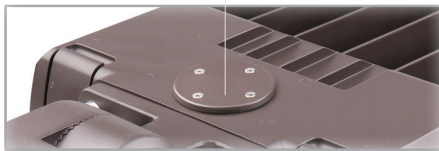

### Rugged Die Cast Aluminum Housing

(Bronze)



### Pressure Relief Respirator

for expansion/contraction

### Complete with Trunnion

Interchangeable mounting options sold separately

### Quick-Release, Hinged Access Cover

for control compartment

**Accessories (Ordered Separately):**

Slip Fit, Pole Mount, Multi Mount, Motion Sensor Remote, Motion Sensor, Photocell and Receptacle, Shield



FL04-SF



FL04-PM



FL04-MM



HB01R



HB01DMS-B

## TECHNICAL DATA




### LIGHT SPECIFICATIONS

Lumens	62,228 lm
Efficacy	138 lm/W
CCT	4000K
CRI	> 70
L70 Life	> 54,000 hrs
Dimmable	0-10V
Warranty	10-year


### APPROVALS AND LISTINGS

cUL	E482965
DLC Premium	PLREAQFBZKXH

### DIMENSIONS (SHOWN WITH TRUNNION MOUNT)

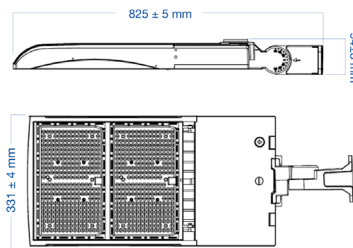

### ISOCANDELA

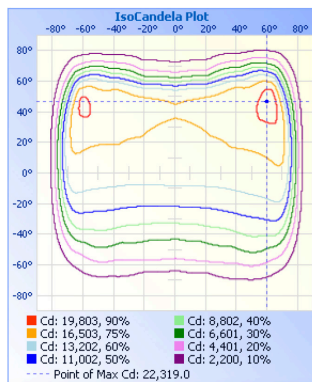

### ILLUMINANCE AT A DISTANCE

Distance (ft)	Center Beam Fc (ft)	Beam Width (ft)
17.0ft	49.8 ft	38.4 ft 104.0 ft
34.0ft	12.4 ft	76.7 ft 208.1 ft
51.0ft	5.53 ft	115.1 ft 312.1 ft
68.0ft	3.11 ft	153.4 ft 416.2 ft
85.0ft	1.99 ft	191.8 ft 520.2 ft
102.0ft	1.38 ft	230.2 ft 624.2 ft

Vert. Spread: 96.9°  
Horiz. Spread: 143.8°

### ELECTRICAL

Wattage	450W
Voltage	120-347V
Power Factor	> 0.9
THD	< 15%
Operating Temp	-40 to 50°C

### CONSTRUCTION

Housing	Die-Cast Aluminum
Cover	Polycarbonate
Finish	Bronze
IP Rating	IP65
EPA	2.31 ft <sup>2</sup>
Net Weight	9.32 kg
Gross Weight	10.32 kg
Carton Qty	1
Carton Dimensions	915 x 380 x 155 mm

### ACCESSORIES (SOLD SEPARATELY)

Slip Fit	FL04-SF
Pole Mount	FL04-PM
Multi Mount	FL04-MM
Motion Sensor	HB01DMS-B
Motion Sensor Remote	HB01R
Photocell and Receptacle for 120-277V sites	JL-200 and JL-205LV
Photocell and Receptacle for 277-480V sites	JL-200 and JL-207E
Shield	FL04B-SHIELD-LG