


REMOTE CONTROL (HB01R) OPERATING MANUAL

for Motion Sensor HB01DMS-B

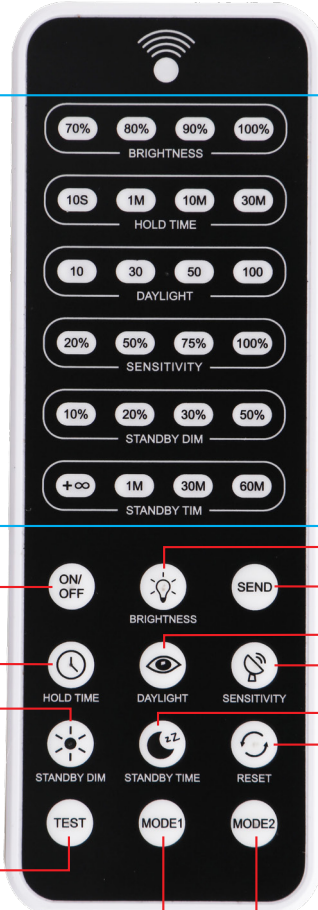

Display Area

Main **ON/OFF** button
Press and hold until the brightness indicator light is on (First-row).
Press to turn on or turn off the fixture.

Press **HOLD TIME** to set hold time period: 10s, 1min, 10min or 30min.

Press **STANDBY DIM** to set standby dim level: 10%, 20%, 30% or 50%.

The **“TEST”** button is for testing purpose. Pressing this button, the sensor goes to test mode (Hold time is only 3s if motion detected).

MODE 1 or MODE 2 button
To set the mode, save all other settings first, then press and hold either MODE 1 or MODE 2 to remember the saved settings. To program additional sensors, press MODE 1 or MODE 2, and then press "SEND" to program that sensor.

Press **BRIGHTNESS** to set brightness level: 70%, 80%, 90% or 100%.

Press **SEND** to save settings after each change. The indicator light confirms the save setting.

Long press **DAYLIGHT** to activate the daylight control. Short press to set daylight threshold: 10Lux, 30Lux, 50Lux or 100Lux. By default, the daylight control disabled.

Press **SENSITIVITY** to set sensitivity level: 20%, 50%, 75% or 100%.

Press **STANDBY TIME** to set stand-by period: +∞, 1min, 30min or 60min.
Note: “+∞” means the light will remain at the standby dim level until motion is detected. When a time is selected, the fixture will turn off after the set time.

Press **RESET** to restore to default settings (Brightness 70%, hold time 10s, daylight threshold disabled, sensitivity 20%, stand-by dimming level 10%, and stand-by time +∞).
Note: Products with DIP switch will be controlled by DIP switches.

NOTES:

- The upper area of the remote control is Display Area; lower area is Button Area.
- Indicator lights will automatically turn off if not in use more than 10 seconds
- When using “On/Off” button: “On/Off”, “Brightness”, and “Send” buttons remain working. Other settings will be disabled.
- When using “Test” button: “Test”, “Sensitivity”, and “Send” remain working. Other settings will be disabled.
- You must press “Send” button to save your settings after each adjustment. Red indicator light on means successfully saved your settings.