

# High Bay

Power Selectable | Colour Selectable | 120-347V

## HB8 HIGH BAY

The successor to our best-selling HB7C High Bays!  
Ideal for warehouses, factories, gas stations, gymnasiums, grocery stores, food processing facilities, and more

Newly Designed,  
Shatterproof  
Polycarbonate Optics  
meet/exceed DLC 5.1  
glare standards



Power Selectable  
200W / 220W / 240W

Complete with 6'  
Cord Whip

Instant Start and  
0-10V Dimmable



Long Life, Elevated Driver  
for cooler operation

Polyester Powder  
Coat Finish  
white

Colour Selectable  
3000K / 4000K / 5000K

## TECHNICAL DATA



### LIGHT SPECIFICATIONS


Lumens*	33,267 lm
Efficacy*	137 lm/W
CCT	3000K / 4000K / 5000K
CRI	81
Beam Angle	90°
Dimmable	0-10V
L70 Life	50,000 hrs
Warranty	5-year

\*Shown at 240W and 3000K


### APPROVALS & LISTINGS

cUL	E482965
DLC	S-RMOULY

### DIMENSIONAL DRAWINGS

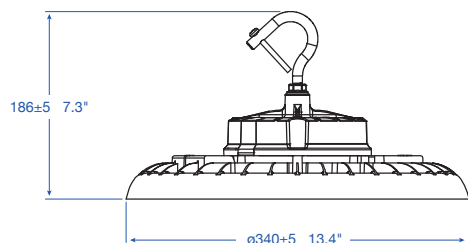

### ILLUMINANCE AT A DISTANCE

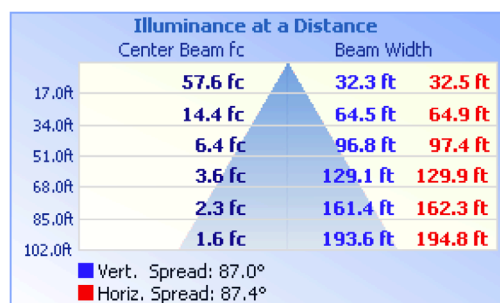

### ELECTRICAL

Wattage	200W / 220W / 240W
Voltage	120-347V
Current	2.70A
Surge Protection	6kV
Auxiliary Output	12V
Power Factor	0.9
THD	15%
Operating Temp	-40 to 50°C

### CONSTRUCTION

Cord Whip	6'
Housing	Die-Cast Aluminum
Lens	Polycarbonate
Finish	Powder Coated
Finish Colour	White
IP Rating	IP65

### DIMENSIONS AND WEIGHTS

Fixture Weight	6.83 lbs
Fixture Dimensions	11 x 11 x 7.3 in
Carton Qty	1
Carton Weight	7.94 lbs
Carton Dimensions	13.4 x 13.4 x 7.3 in

### ACCESSORIES (Ordered Separately)

Polycarbonate Reflector	HB8-PC-REF-LG
Polycarbonate Cover	HB8-PC-REF-LG-BCV
Aluminum Reflector	HB8-AL-REF-LG
Wire Guard	HB8-WG-LG
Microwave Sensor	HB01DMS-A
Motion Sensor Remote	HB01R
Frosted Lens	HB8-FR-LENS-LG
120° Optics	HB8-120D-LENS-LG
60° Optics	HB8-60D-LENS-LG
Safety Cable	HB8-CABLE

HEAD OFFICE: 8 - 540 Jamieson Pkwy, Cambridge, ON, N3C 0G5 | orders@csc-led.com | (519) 880 - 9833