

# 2'x 4' Premium Panel

30W, 40W, 50W Selectable | Colour Tunable | 120-347V

High performance, light-weight luminaires suitable for lay-in, surface or pendant mounting. Ideal for use in schools, health care applications, offices, retail spaces, and more


Less than 1.8" Deep  
ideal for tight plenum areas

Use Switches to Select Colour  
Temperature and Wattage


Non-yellowing  
Frosted Lens



Wattage Selectable  
(30W / 40W / 50W)



CCT Tunable  
(3000K / 3500K / 4000K)

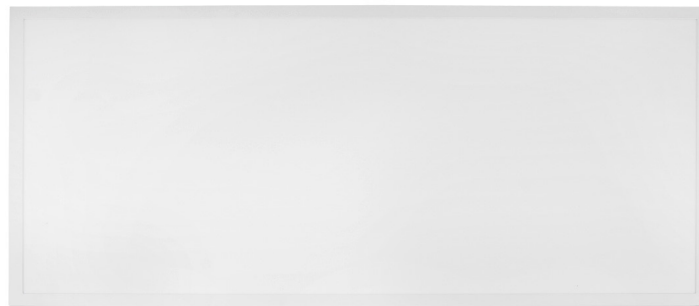

120-347V, 0-10V  
Dimmable Driver




Seismic Clips  
Included



Waffle Stamping

increases heat dissipation  
and driver life

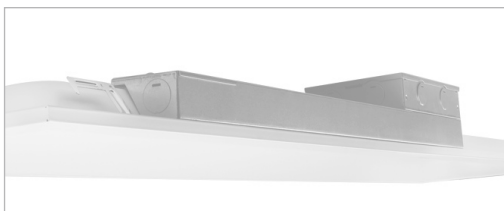

0-10V Dimming Leads on Both  
Sides of Optional Junction Box  
Junction Box (PLS-JB) sold separately

Accessories (Sold Separately)



Suspension Kit  
PLS-SUSKIT



Surface Mount Kit  
PLS24-SK



Junction Box  
PLS-JB



Recessed Frame Kit  
PLS24-RFK

## TECHNICAL DATA




### LIGHT SPECIFICATIONS

Lumens	6,250 lms @ 3000K
Efficacy	125 lm/W
CCT	Tunable (30K/35K/40K)
CRI	80
Dimmable	0-10V
Beam Angle	120°
L70 Life	50,000 hrs
Warranty	7-year

### APPROVALS AND LISTINGS

ETL	5000444
-----	---------

### ISOCANDELA PLOT

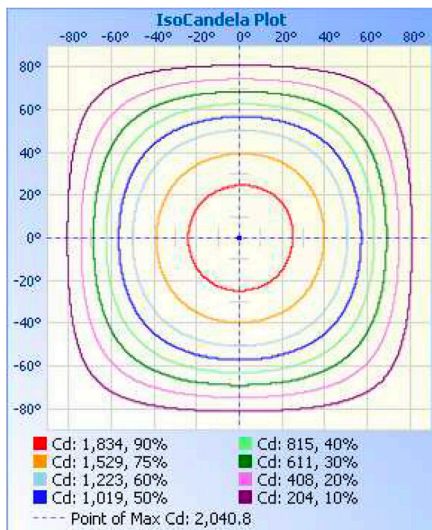

### ILLUMINANCE AT A DISTANCE

	Center Beam fc	Beam Width	
17.0ft	7.05 fc	52.4 ft	52.1 ft
34.0ft	1.76 fc	104.7 ft	104.2 ft
51.0ft	0.78 fc	157.1 ft	156.3 ft
68.0ft	0.44 fc	209.5 ft	208.4 ft
85.0ft	0.28 fc	261.9 ft	260.5 ft
102.0ft	0.20 fc	314.2 ft	312.6 ft

■ Vert. Spread: 114.0°  
■ Horiz. Spread: 113.7°

### ELECTRICAL

Wattage	Selectable (30W/40W/50W)
Voltage	120-347V
Power Factor	0.9
THD	6%
Operating Temp	-20 to 40°C

### CONSTRUCTION

Housing	Metal
Finish	White
IP Rating	IP20
Product Dimensions	23.75 x 47.72 x 1.67 in
Carton Qty	4

### ACCESSORIES (SOLD SEPARATELY)

PLS24-SK	Surface Mount Kit
PLS24-RFK	Recessed Frame Kit
PLS-SUSKIT	Suspension Kit
PLS-JB	Junction Box

### DIMENSIONAL DRAWINGS (IN)

