

# 2'x 4' Panel

30W, 40W, 50W Selectable | 3CCT | 120-347V


High performance, light-weight luminaires suitable for lay-in, surface or pendant mounting. Ideal for use in schools, health care applications, offices, retail spaces, and more

Less than 1.8" Deep  
ideal for tight plenum areas

0-10V Dimming Lead on Both  
Sides of Driver Junction Box



Non-yellowing  
Frosted Lens

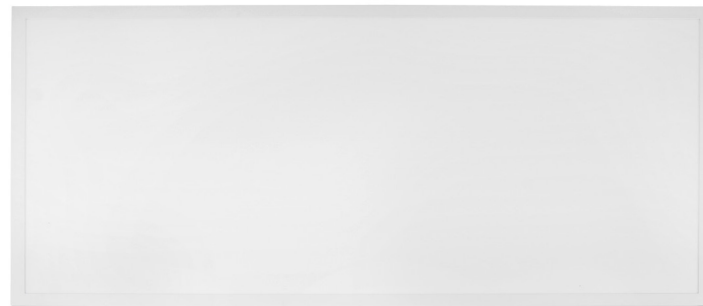

120-347V, 0-10V  
Dimmable Driver


Power Selectable  
(30W / 40W / 50W)



Colour Selectable  
(3500K / 4000K / 5000K)

Waffle Stamping  
increases heat dissipation  
and driver life

Use Switches to  
Select Power & Colour

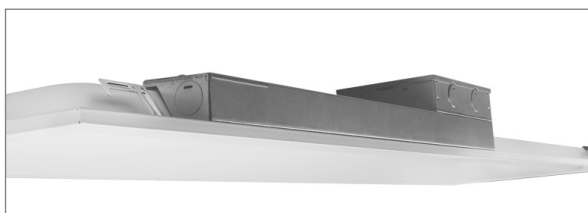

Seismic Clips  
Included

Junction Box (PLS-JB)  
sold separately

Accessories (Sold Separately)



Suspension Kit  
PLS-SUSKIT



Surface Mount Kit  
PLS24-SK



Junction Box  
PLS-JB



Recessed Frame Kit  
PLS24-RFK

## TECHNICAL DATA



### LIGHT SPECIFICATIONS


Lumens	5,308 lm
Efficacy	110 lm/W
CCT	3500K/4000K/5000K
CRI	>80
Dimmable	0-10V
Beam Angle	120°
L70 Life	>54,000 hrs
Warranty	7-year

	3500K	4000K	5000K
30W	3830 lm	3966 lm	3819 lm
40W	4884 lm	5133 lm	4900 lm
50W	5308 lm	5656 lm	5355 lm

### APPROVALS AND LISTINGS

ETL	5000444
DLC	S-STR40A

### DIMENSIONAL DRAWINGS (IN)

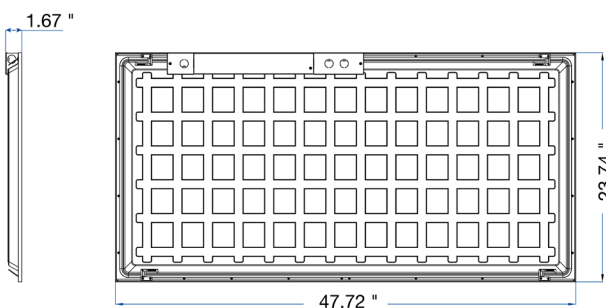

### ELECTRICAL

Wattage	Selectable (30W/40W/50W)
Voltage	120-347V
Power Factor	>0.9
Current	0.55A
THD	<20%
Operating Temp	-20 to 40°C

### CONSTRUCTION

Housing	Metal
Finish	Polyester Powder Coat
Finish Colour	White
IP Rating	IP20

### DIMENSIONS & WEIGHTS

Fixture Weight	8.5 lbs
Fixture Dimensions	23.75" x 1.67" x 47.72"
Carton Qty	4 pcs
Carton Weight	32.6 lbs
Carton Dimensions	48.7" x 7" x 25"

### ACCESSORIES (SOLD SEPARATELY)

PLS24-SK	Surface Mount Kit
PLS24-RFK	Recessed Frame Kit
PLS-SUSKIT	Suspension Kit
PLS-JB	Junction Box