

2'x 4' Panel

30W, 40W, 50W Selectable | 4000K | 120-277V

High performance, light-weight luminaires suitable for lay-in, surface or pendant mounting. Ideal for use in schools, health care applications, offices, retail spaces, and more

Less than 1.8" Deep
ideal for tight plenum areas

0-10V Dimming Lead on Both
Sides of Driver Junction Box



Non-yellowing
Frosted Lens


120-277V, 0-10V
Dimmable Driver

Wattage Selectable
(30W / 40W / 50W)

Use Switch to
Select Wattage

Waffle Stamping
increases heat dissipation
and driver life

Seismic Clips
Included

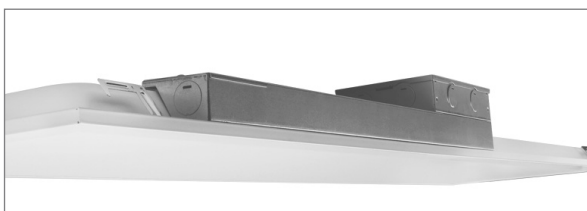

Junction Box (PLS-JB)
sold separately

Accessories (Sold Separately)



Suspension Kit
PLS-SUSKIT



Surface Mount Kit
PLS24-SK



Junction Box
PLS-JB



Recessed Frame Kit
PLS24-RFK

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	5,909 lms
Efficacy	121 lm/W
CCT	4000K
CRI	80
Dimmable	0-10V
Beam Angle	120°
L70 Life	50,000 hrs
Warranty	7-year

APPROVALS AND LISTINGS

ETL	5000444
DLC	S-WZJT5M

ISOCANDELA PLOT

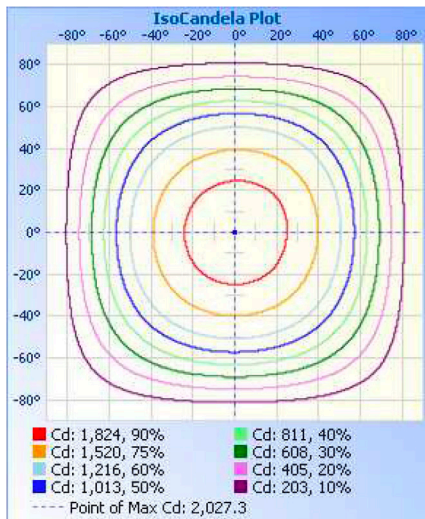

ILLUMINANCE AT A DISTANCE

	Center Beam fc	Beam Width	
17.0ft	7.01 fc	52.4 ft	52.2 ft
34.0ft	1.75 fc	104.8 ft	104.3 ft
51.0ft	0.78 fc	157.2 ft	156.5 ft
68.0ft	0.44 fc	209.6 ft	208.7 ft
85.0ft	0.28 fc	262.0 ft	260.8 ft
102.0ft	0.19 fc	314.5 ft	313.0 ft

■ Vert. Spread: 114.1°
■ Horiz. Spread: 113.8°

ELECTRICAL

Wattage	Selectable (30W/40W/50W)
Voltage	120-277V
Power Factor	0.95
THD	11.6 %
Operating Temp	-20 to 40°C


CONSTRUCTION

Housing	Metal
Finish	White
IP Rating	IP20
Product Dimensions	23.75 x 47.72 x 1.67 in
Carton Qty	4

ACCESSORIES (SOLD SEPARATELY)

PLS24-SK	Surface Mount Kit
PLS24-RFK	Recessed Frame Kit
PLS-SUSKIT	Suspension Kit
PLS-JB	Junction Box

DIMENSIONAL DRAWINGS (IN)

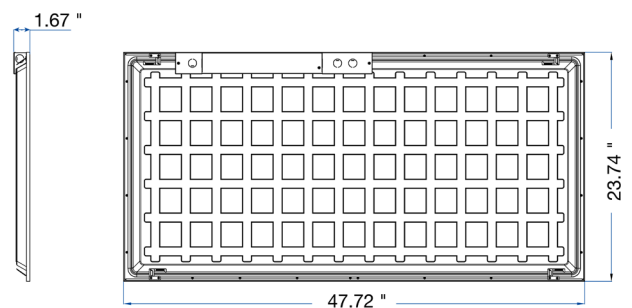

HEAD OFFICE: 8 - 540 Jamieson Pkwy, Cambridge, ON, N3C 0G5 | orders@csc-led.com | (519) 880 - 9833