

NEMA 4X Vapour Tight

Power Selectable | Colour Selectable | 120-347V

Ideal for parking garages, car washes, industrial applications, food processing plants, paint shops, and other harsh environments



Colour Selectable
3500K / 4000K / 5000K



Stainless Steel
Spring Clips



One Piece Gear Tray
for quick access to driver
and accessories

120-347V Driver

Polycarbonate
Low Glare Lens

Power Selectable
20W / 28W / 35W



1/2" NPT Entry



Accessories (Ordered Separately): Microwave Motion Sensor (MS01-MW-HW-DC), Emergency LED Driver (BLD-YT08D)



MS01-MW-HW-DC



BLD-YT08D

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	4,550 lm
Efficacy	130 lm/W
CCT	3500K / 4000K / 5000K
CRI	84
Dimmable	0-10V
Life	50,000 hrs
Warranty	5-year


APPROVALS AND LISTINGS

ETL	5001780
DLC Premium	S-AR3ION, S-VKND80

ISOCANDELA PLOT

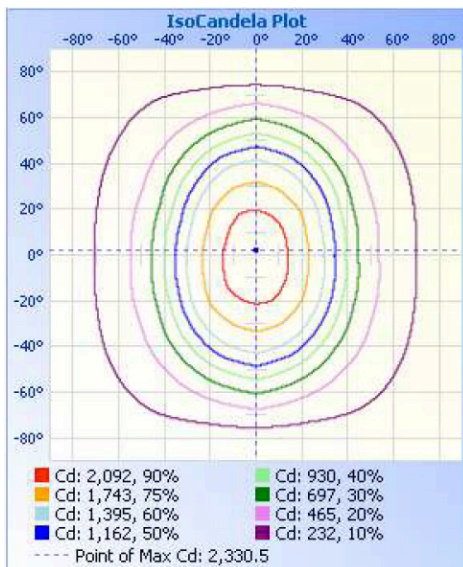

ILLUMINANCE AT A DISTANCE

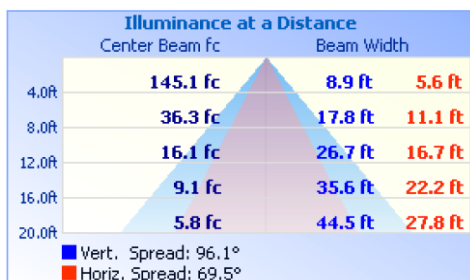

ELECTRICAL

Wattage	20W / 28W / 35W
Voltage	120-347V
Current	0.5A
Power Factor	0.93
THD	15.1%
Operating Temp	-40°C to 40°C

CONSTRUCTION

Housing	Polycarbonate
Finish	White/Grey
Length	4 ft
IP Rating	IP66

DIMENSIONS AND WEIGHTS

Master Carton Qty	4
Carton Qty	1
Fixture Weight	4.9 lbs
Master Carton Gross Weight	24.8 lbs
Carton Gross Weight	5.6 lbs
Master Carton Dimensions	47.5 x 9.6 x 8.4 in
Carton Dimensions	46.8 x 4.7 x 3.6 in
Product Dimensions	46.7 x 4.2 x 3.3 in

DIMENSIONAL DRAWING (IN)

