

NEMA 4X Vapour Tight

Power Selectable | Colour Selectable | 120-347V

Ideal for parking garages, car washes, industrial applications, food processing plants, paint shops, and other harsh environments



Stainless Steel Spring Clips

One Piece Gear Tray for quick access to driver and accessories

Colour Selectable
3500K / 4000K / 5000K

120-347V Driver

Polycarbonate Low Glare Lens

Power Selectable
65W / 75W / 90W / 110W

1/2" NPT Entry



Accessories (Ordered Separately): Microwave Motion Sensor (MS01-MW-HW-DC), Emergency LED Driver (BLD-YT08D)



MS01-MW-HW-DC



BLD-YT08D

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	15,400 lm
Efficacy	140 lm/W
CCT	3500K / 4000K / 5000K
CRI	83
Dimmable	0-10V
Life	50,000 hrs
Warranty	5-year


APPROVALS AND LISTINGS

ETL	5001780
DLC	S-PUF6XT, S-9VC8KG

ISOCANDELA PLOT

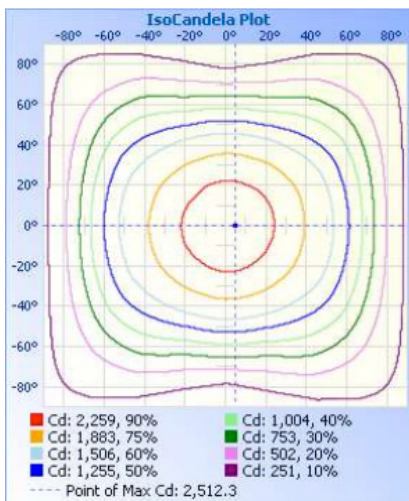

ILLUMINANCE AT A DISTANCE

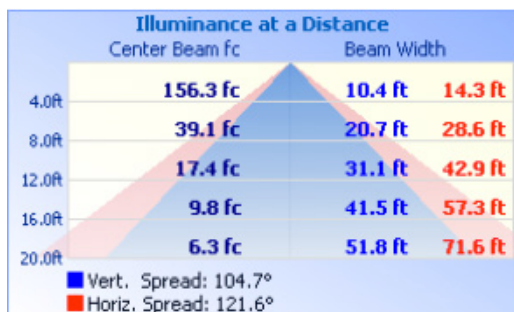

ELECTRICAL

Wattage	65W / 75W / 90W / 110W
Voltage	120-347V
Current	0.55A
Surge Protection	2kV
Auxiliary	12V
Power Factor	0.95
THD	9.5%
Operating Temp	-40°C to 40°C

CONSTRUCTION

Housing	Polycarbonate
Finish	White/Grey
Length	8 ft
IP Rating	IP66

DIMENSIONS AND WEIGHTS

Fixture Weight	10.5 lbs
Fixture Dimensions	92 x 3.3 x 4.3 in
Carton Qty	1
Carton Gross Weight	12.3 lbs
Carton Dimensions	94 x 4 x 4.7 in

DIMENSIONAL DRAWING (IN)

