

NEMA 4X Vapour Tight

36W | 4000K | 120-347V | 4 ft



Ideal for parking garages, industrial applications, agricultural applications, food processing plants, paint shops, and other harsh environments



NEMA 4X



120-347V Driver

Low Glare
Frosted Lens




Conduit Entry
on both ends

Installation Brackets
can be slid anywhere along
entire surface for matching
joist pattern

304 Stainless
Steel Locking
Buckles

One Piece
Gear Tray
for quick access
to driver and
accessories

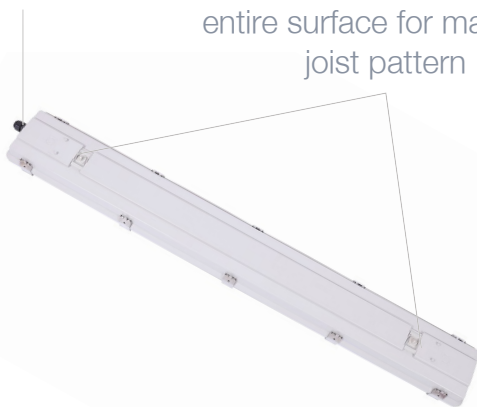

Accessories (Ordered Separately):
Motion Sensor (STVT-IMS or VTHB-IMS)



STVT-IMS



VTHB-IMS

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	4,605 lm
Efficacy	127.62 lm/W
CCT	4000K
CRI	84.8
Dimmable	0-10V
Life	50,000 hrs
Warranty	5-year


APPROVALS AND LISTINGS

cETL	5001780
DLC Premium	PLBLOR5UKNJO

DIMENSIONS

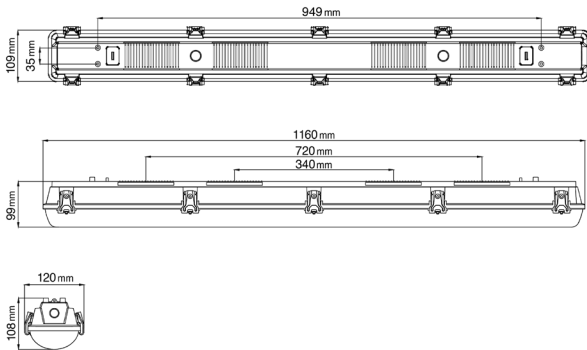

ISOCANDELA

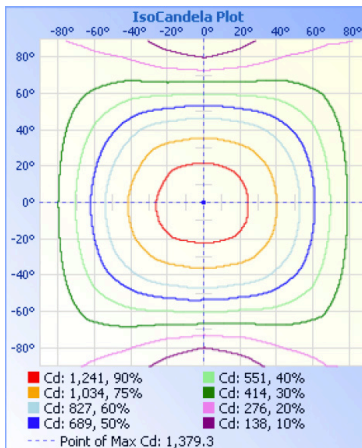

ELECTRICAL

Wattage	36W
Voltage	120-347V
Power Factor	0.91
THD	14.25%
Operating Temp	-40 to 40°C

CONSTRUCTION

Housing	Polycarbonate
Finish	White / Grey
IP Rating	IP66
Weight	4.4 lbs
Ctn Qty	4

ACCESSORIES (Ordered Separately)

VTHB-IMS	Motion Sensor
STVT-IMS	Motion Sensor

NOTE: VTHB-IMS can be mounted over 4 metres.
STVT-IMS can be mounted at a max height of 4 metres.



VTHB-IMS



STVT-IMS

ILLUMINANCE AT A DISTANCE

	Illuminance at a Distance		
	Center Beam fc	Beam Width	
4.0ft	86.2 fc	10.8 ft	14.9 ft
8.0ft	21.5 fc	21.5 ft	29.7 ft
12.0ft	9.6 fc	32.3 ft	44.6 ft
16.0ft	5.4 fc	43.0 ft	59.5 ft
20.0ft	3.4 fc	53.8 ft	74.4 ft

■ Vert. Spread: 106.7°
■ Horiz. Spread: 123.4°

Western Canada Warehouse: 121-1647 Broadway Street, Port Coquitlam, BC V3C 6P8 | ordersbc@csc-led.com