

# 40W Contractor series Wall Pack

Semi cut-off, DLC listed

Value priced with a traditional look - Ideal for exterior security and entryway lighting



LM80 tested  
Lumiled light engine

Rugged borosilicate  
glass

Prismatic glass  
for optimal  
diffusion

Die-cast  
aluminum body

Purpose built  
driver inside

Photocell  
ready

Durable anodized  
finish (Bronze)



## TECHNICAL DATA



### LIGHT SPECIFICATIONS

Lumens	4,236
Efficacy	111.52 lm/W
CCT	4000K
CRI	83.9
Dimmable	Yes
Rated hours	50,000
Warranty	10-year

### APPROVALS AND LISTINGS


cUL	E482965
DLC	PLJPM8NJV4RC

### ILLUMINANCE AT A DISTANCE

	Center Beam Fc	Beam Width	
17.0ft	3.19 fc	48.7 ft	31.1 ft
34.0ft	0.80 fc	97.5 ft	62.2 ft
51.0ft	0.35 fc	146.2 ft	93.2 ft
68.0ft	0.20 fc	194.9 ft	124.3 ft
85.0ft	0.13 fc	243.7 ft	155.4 ft
102.0ft	0.09 fc	292.4 ft	186.5 ft

■ Vert. Spread: 110.2°  
■ Horiz. Spread: 84.9°

### ISOCANDELA PLOT

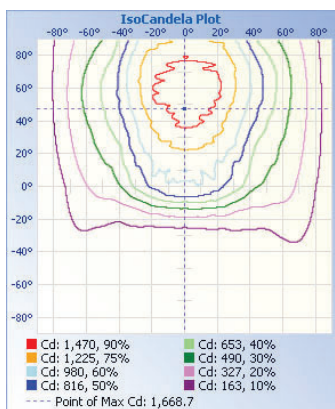

### ELECTRICAL

Wattage	40W
Voltage	120-277V
Power factor	0.90
THD	15.33%
Operating temp	-40 to 40°C

### CONSTRUCTION

Housing	Aluminum Borosilicate Glass
Finish	Multi-coat powder
Colour	Bronze
IP rating	IP65
Weight	10.91 lbs
Carton qty	1
Carton size	430 x 295 x 290 mm

### DIMENSIONS

