

80W Contractor series Wall Pack

Semi cut-off, DLC listed

Value priced with a traditional look - Ideal for exterior security and entryway lighting



LM80 tested
Lumiled light engine

Rugged borosilicate
glass

Prismatic glass
for optimal
diffusion

Die-cast
aluminum body

Purpose built
driver inside

Photocell
ready

Durable anodized
finish (Bronze)



TECHNICAL DATA



LIGHT SPECIFICATIONS

Lumens	10,171
Efficacy	128.57 lm/W
CCT	4000K
CRI	83.2
Dimmable	Yes
Rated hours	50,000
Warranty	10-year

APPROVALS AND LISTINGS


cUL	E482965
DLC	PLTRDSPYHVHG

ILLUMINANCE AT A DISTANCE

Distance (ft)	Illuminance at a Distance	
	Center Beam fc	Beam Width
17.0ft	8.59 fc	49.5 ft 34.0 ft
34.0ft	2.15 fc	99.0 ft 68.0 ft
51.0ft	0.95 fc	148.5 ft 102.0 ft
68.0ft	0.54 fc	198.1 ft 136.0 ft
85.0ft	0.34 fc	247.6 ft 169.9 ft
102.0ft	0.24 fc	297.1 ft 203.9 ft

■ Vert. Spread: 111.0°
■ Horiz. Spread: 90.0°

ISOCANDELA PLOT

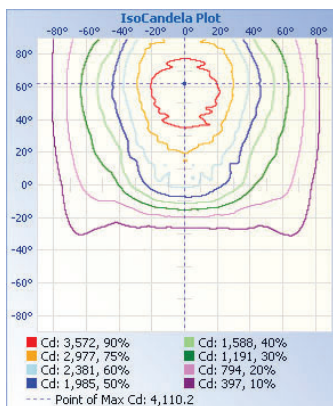

ELECTRICAL

Wattage	80W
Voltage	120-277V
Power factor	0.94
THD	12.55%
Operating temp	-40 to 40°C

CONSTRUCTION

Housing	Aluminum Borosilicate Glass
Finish	Multi-coat powder
Colour	Bronze
IP rating	IP65
Weight	10.91 lbs
Carton qty	1
Carton size	430 x 295 x 290 mm

DIMENSIONS

