

Edge Flood Light

Flexible, modular design
Works well as a high bay or flood light



Over 120 lumens
per watt

Durable aluminum
alloy construction

Easy installation
and maintenance

Replaces 1500W MH or HPS

TECHNICAL DATA



LIGHT SPECIFICATIONS


Lumens	54,764 lm
Efficacy	120.73 lm/W
CCT	5000K
Beam angle	Standard 70/135° Options: 30/100°, 90°
Rated hours	100,000
Warranty	5-year

APPROVALS AND LISTINGS

DLC PREMIUM	PYVFBY65
-------------	----------

DIMENSIONS

41.9" x 14.4" x 8.9"

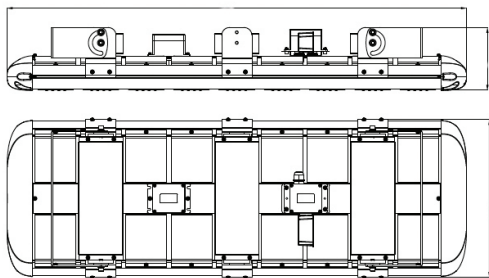


ELECTRICAL

Wattage	450W
Voltage	120-277V
Power factor	0.93
EPA	5.02
Operating temp	-30 to 45°C

CONSTRUCTION

Housing	Aluminum Alloy
Colour	Silver
IP rating	IP66
Weight	35.7 lbs
Carton qty	1

ISOCANDELA CURVES

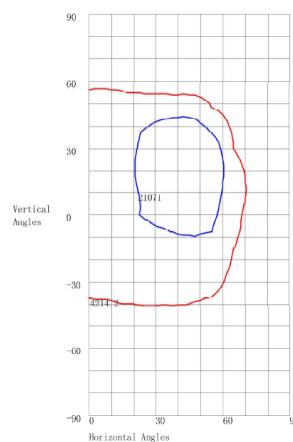

Maximum Candela = 4214.2 Located At Horizontal Angle = 55, Vertical Angle = 22.5
 50% Maximum Candela = 2107.1
 10% Maximum Candela = 4214.2