

# 110W Linear High Bay



Suitable for manufacturing, shops and warehouse applications

Slim, compact design. 120-347V

Low glare frosted lens included  
(can be removed)

Steel housing with white  
epoxy powder coat finish



120-347V  
driver

Chain mounts and v-hooks included

Optional dimmable motion sensor ordered separately

Optional wire guard ordered separately

Optional bracket ordered separately

## TECHNICAL DATA



### LIGHT SPECIFICATIONS

Lumens	15,363 lm
Efficacy	139.37 lm/W
CCT	5000K
CRI	80
Beam angle	100°
L70 Life	50,000
Dimmable	0-10V
Warranty	5-year

### ELECTRICAL

Wattage	110W
Voltage	120-347V
Power factor	0.90
THD	15%
Operating temp	-40 to 50°C


### APPROVALS AND LISTINGS

cUL	E482965
DLC Premium	PLX2I4X0BQCM
LED CHIP	LUMILEDS 2835


### CONSTRUCTION

Housing	Steel
Finish	White
IP rating	IP40 (damp location)
Weight	3.2 lbs
Carton qty	2


### ISOCANDELA PLOT

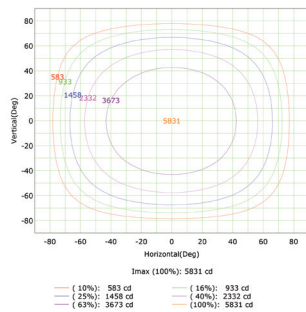

### DIMENSIONS

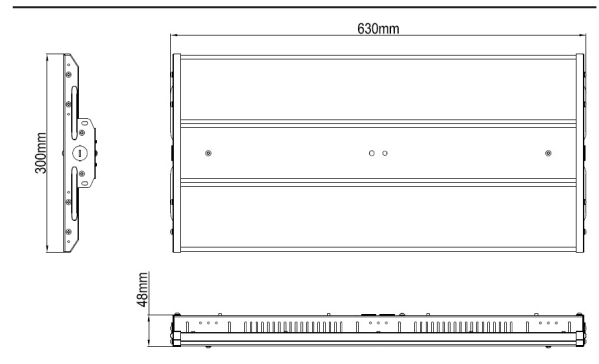

### ILLUMINANCE AT A DISTANCE

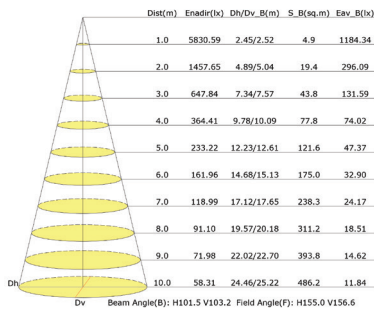

Western Canada Warehouse: 121-1647 Broadway Street, Port Coquitlam, BC V3C 6P8 | [ordersbc@csc-led.com](mailto:ordersbc@csc-led.com)