

# 36W Economy Vapour Tight

Ideal for parking structures, paint lines, and parts inspections  
Suitable for damp/wet locations or wherever a high impact-resistant fixture is required

120-347V driver

Ideal replacement  
for T8 fixtures

High impact  
polycarbonate housing

IP66, NEMA 4X,  
and IK10 rated

Low glare  
frosted lens

Internal dimming motion sensor  
option available,  
ordered separately

## TECHNICAL DATA

### LIGHT SPECIFICATIONS

Lumens	4,680 lm
Efficacy	130 lm/W
CCT	5000K
CRI	86
L70 Life	50,000 hrs
Dimmable	0-10V
Warranty	5-year

### APPROVALS AND LISTINGS

cETL

NEMA 4X


### ELECTRICAL

Wattage	36W
Voltage	120-347V
Power factor	0.92
THD	16.49%
Operating temp	-35° to 40°C


### CONSTRUCTION

Housing	Polycarbonate
Finish	White / Grey
IP rating	IP66
Weight	4.4 lbs
Carton qty	4


### ILLUMINANCE AT A DISTANCE

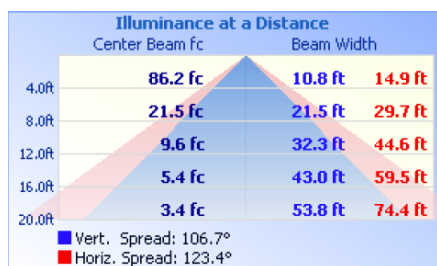

### DIMENSIONS

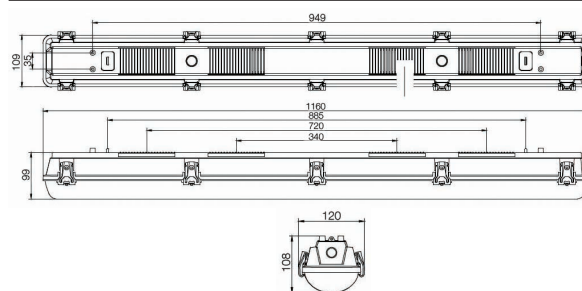

### ISOCANDELA PLOT

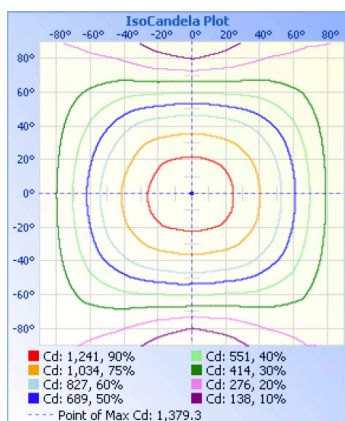

### ACCESSORIES



Motion Sensor STVT-IMS