


Architectural Linear Strip

40W | CCT Selectable | 120-347V | 4ft

Elevate your space by creating your own custom lighting design
Ideal for use in offices, conference rooms, hallways, educational facilities, and more

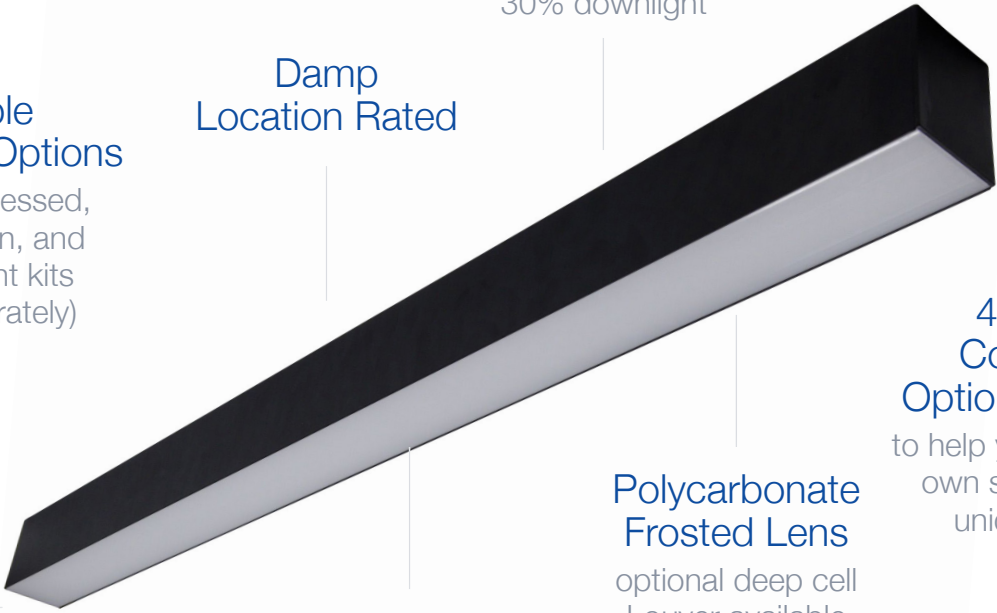

Direct / Indirect
70% uplight and 30% downlight

CCT Selectable
(3000K/3500K/4000K)

Flexible Mounting Options
(T Bar, Recessed, Suspension, and Wall Mount kits sold separately)

Damp Location Rated

Polycarbonate Frosted Lens
optional deep cell
Louver available

4 Backlit Connector Options Available
to help you create your own seamless and unique design

31.5" Power Cord With Dimming Cables
connects to input power or other luminaires in row mounting applications

0-10V Dimmable





TECHNICAL DATA


LIGHT SPECIFICATIONS

Lumens	4,608 lm
Efficacy	111 lm/W
CCT	Selectable (30K/35K/40K)
CRI	83
Dimmable	0-10V
L70 Life	>50,000 hrs
Warranty	5-year

APPROVALS AND LISTINGS

cUL	E482965
-----	---------

DIMENSIONAL DRAWING

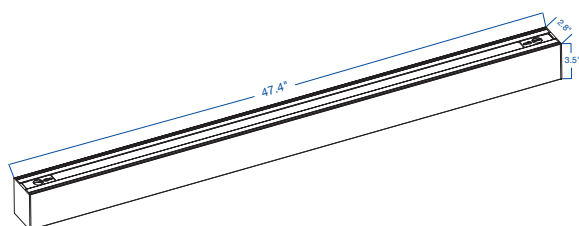

CONNECTORS (Sold Separately)

AL-120-CON-BK	120° Connector (Black)
AL-L-CON-BK	90° Connector (Black)
AL-T-CON-BK	T Connector (Black)
AL-X-CON-BK	X Connector (Black)



NOTE: All Connectors require Connection Kits (AL-C-KIT-BK). Please refer to the connector product sheets to learn more.

ELECTRICAL

Wattage	40W
Voltage	120-347V
Surge Protection	4kV
Auxiliary Output	N/A
Power Factor	>0.9
THD	6.4%
Operating Temp	-30°C to 40°C

CONSTRUCTION

Power Cord	55"
Housing	Aluminum
Finish Colour	Black
Lens	Polycarbonate
IP Rating	IP20 (Damp Location)

DIMENSIONS AND WEIGHTS

Product Dimensions	47.4" x 2.8" x 3.5"
Fixture Weight	6.6 lbs
Carton Qty	1
Carton Gross Weight	7.49 lbs
Carton Dimensions	48.2" x 3.7" x 3"
Master Carton Qty	6
Master Carton Gross Weight	41.9 lbs
Master Carton Dimensions	48.2" x 11.8" x 6.9"

KITS AND MOUNTING (Sold Separately)

AL-C-KIT-BK	Connection Kit (Black)
AL-L-KIT	Louver Kit
AL-MR-KIT	Mud-In Recessed Kit
AL-R-KIT-BK	Recessed Kit (Black)
AL-S-KIT-BK	Suspension Kit (Black)
AL-WM-KIT-BK	Wall Mount Kit (Black)
AL-TB-KIT	T Bar Mounting Kit