


# Architectural Linear Strip

80W | CCT Selectable | 120-347V | 8ft

Elevate your space by creating your own custom lighting design  
Ideal for use in offices, conference rooms, hallways, educational facilities, and more



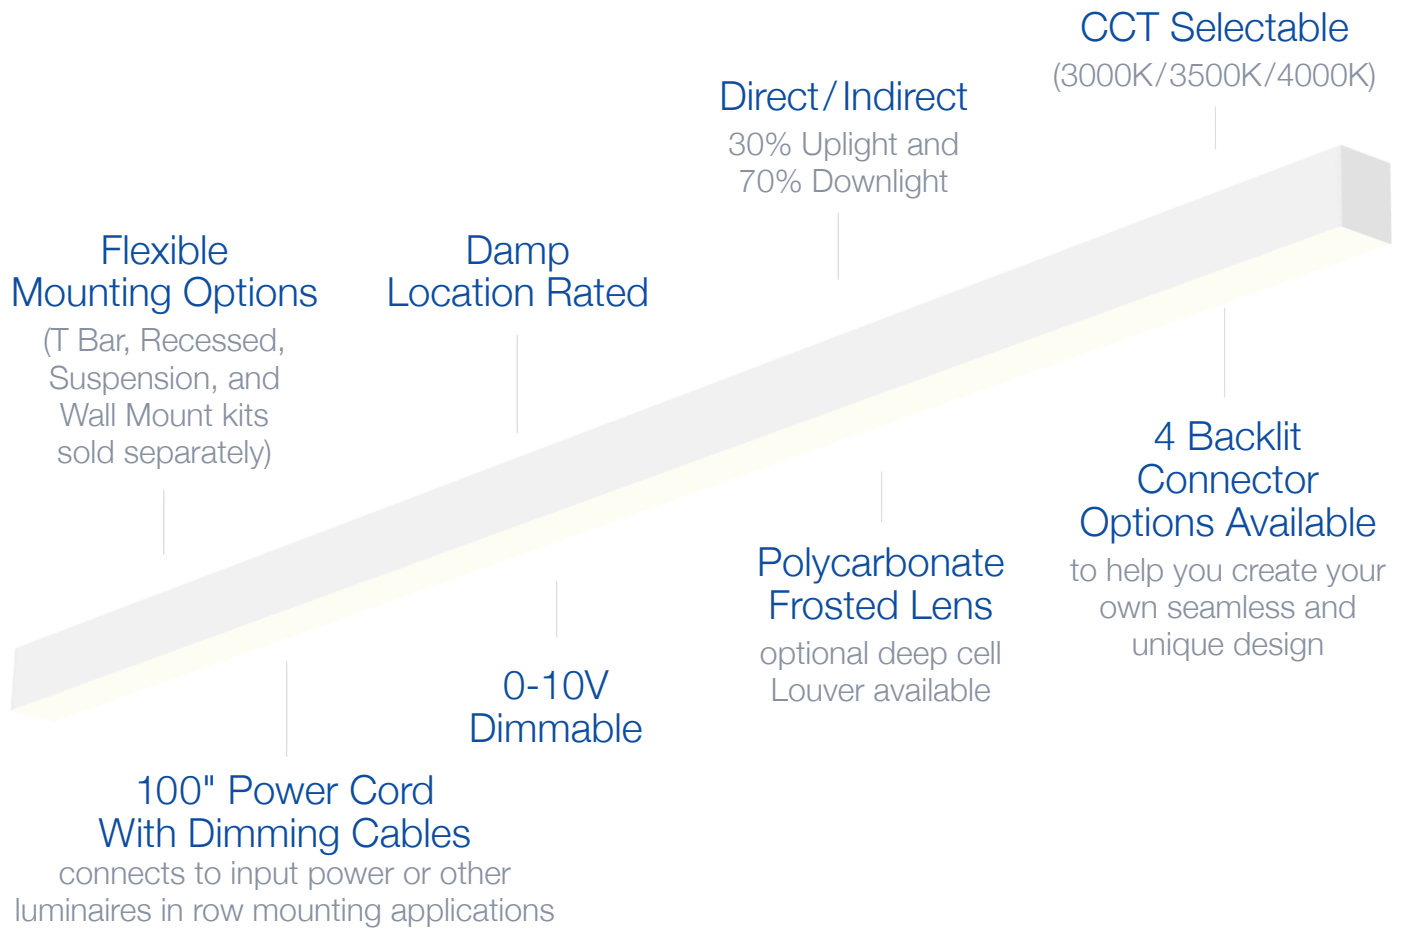

## TECHNICAL DATA


### LIGHT SPECIFICATIONS

Lumens	9,263 lm
Efficacy	112.76 lm/W
CCT	Selectable (30K/35K/40K)
CRI	83
Dimmable	0-10V
L70 Life	>50,000 hrs
Warranty	5-year

### APPROVALS AND LISTINGS


cUL	E482965
-----	---------

### DIMENSIONAL DRAWING

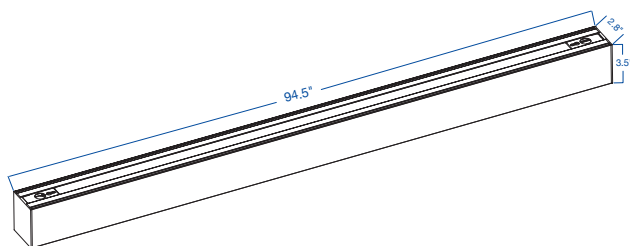

### CONNECTORS (Sold Separately)

AL-120-CON	120° Connector
AL-L-CON	90° Connector
AL-T-CON	T Connector
AL-X-CON	X Connector

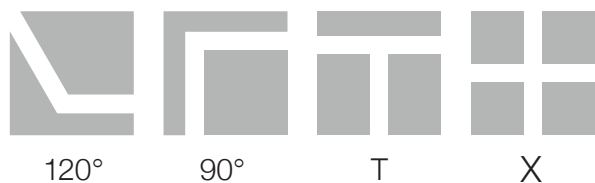

**NOTE:** All Connectors require Connection Kits (AL-C-KIT). Please refer to the connector product sheets to learn more.

### ELECTRICAL

Wattage	80W
Voltage	120-347V
Current	0.85A
Surge Protection	4kV
Auxiliary Output	N/A
Power Factor	>0.9
THD	6.1%
Operating Temp	-30°C to 40°C

### CONSTRUCTION

Power Cord	100"
Housing	Aluminum
Finish Colour	White
Lens	Polycarbonate
IP Rating	IP20 (Damp Location)

### DIMENSIONS AND WEIGHTS

Product Dimensions	94.5" x 2.8" x 3.5"
Fixture Weight	12.1 lbs

Carton Qty	1
Carton Gross Weight	13.4 lbs
Carton Dimensions	95.5" x 3" x 3.7"

Master Carton Qty	6
Master Carton Gross Weight	50.7 lbs
Master Carton Dimensions	96.1" x 6.9" x 7.9"

### KITS AND MOUNTING (Sold Separately)

AL-C-KIT	Connection Kit
*AL-L-KIT	Louder Kit
*AL-MR-KIT	Mud-In Recessed Kit
*AL-R-KIT	Recessed Kit
AL-S-KIT	Suspension Kit
AL-WM-KIT	Wall Mount Kit
AL-TB-KIT	T Bar Mounting Kit

\* Requires x2 kits for use with 8' fixtures (sold separately)